



COF Test & Results



- M10 X 1.5 X 40 Wilson Garner 9.8 plain test bolt
- Zinc plated washer
- Rundown: 30 RPM / tightening: 30 RPM
- Shut off value: 50 NM
- NyShield® with torque modifier applied

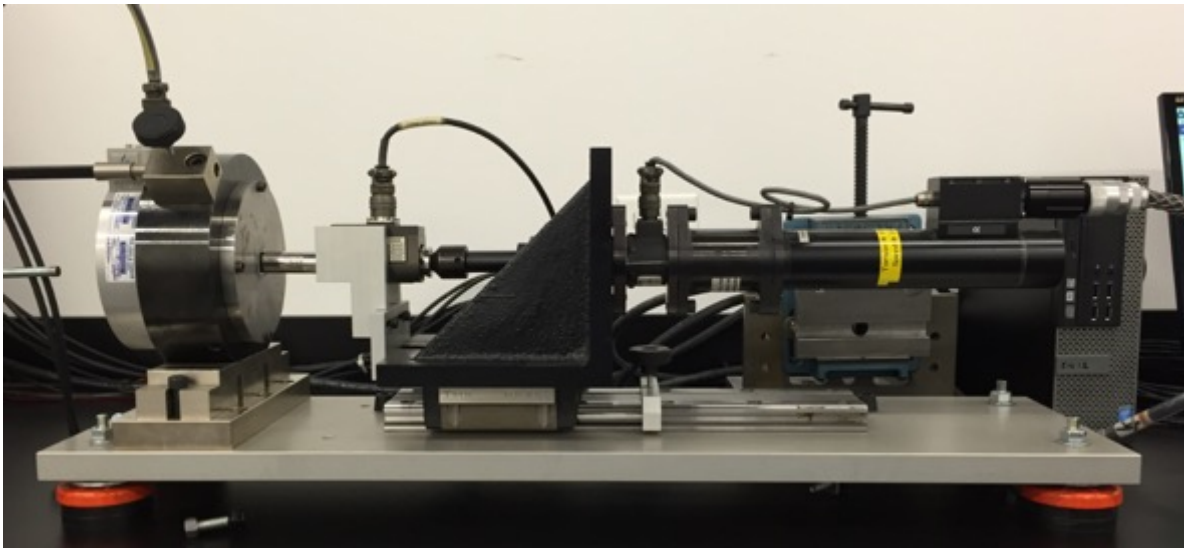

COF testing performed on RS torque tension equipment

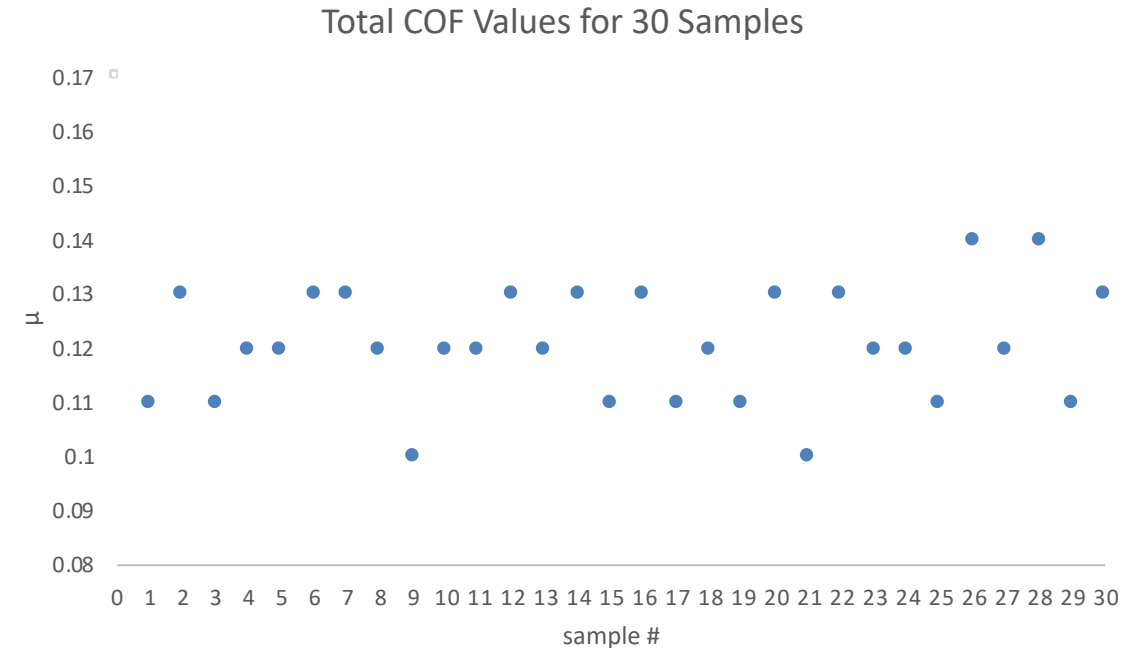

Coefficient of friction values are able to be adjusted as necessary (typical range of +/- 0.03).